

Golden beach from Frankston sand and soil or seek approval for approved equivalent exposed aggregate concrete 125mm compacted depth minimum, 32 Mpa, Off-white cement.




20mm Class 2 Crushed Rock or Sand or alternative recycled crushed concrete as approve by Council's Officer (75mm compacted depth)

Typical Cross Section - Exposed Aggregate Concrete

Pedestrian Only Areas

See Notes for construction & finish requirements

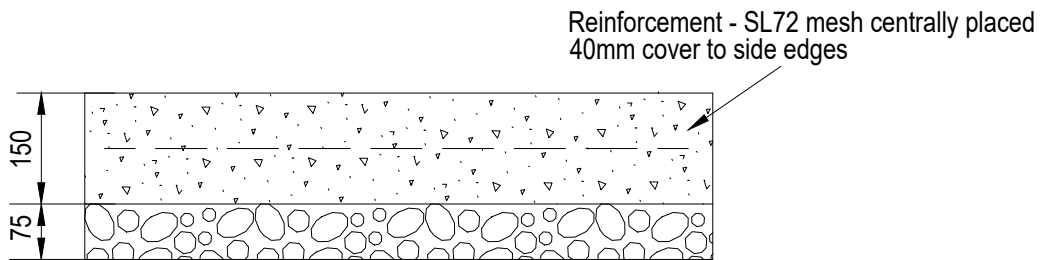

Golden beach from Frankston sand and soil or seek approval for approved equivalent exposed aggregate concrete 150mm compacted depth minimum, 32 Mpa, Off-white cement.



20mm Class 2 Crushed Rock or Sand or alternative recycled crushed concrete as approve by Council's Officer (75mm compacted depth)

Typical Cross Section - Exposed Aggregate Concrete

Trafficable & Pedestrian Areas

See Notes for construction & finish requirements



NOT TO SCALE

DATE: Dec 2012

APPROVED:

DRAWN: P.J.D.

CHECKED: RS

MANAGER ENGINEERING SERVICES

LAST AMENDED:

May 2022

EXPOSED AGGREGATE PAVEMENTS

SD 331

PAGE 1 OF 2