


TENSIONING CONNECTION

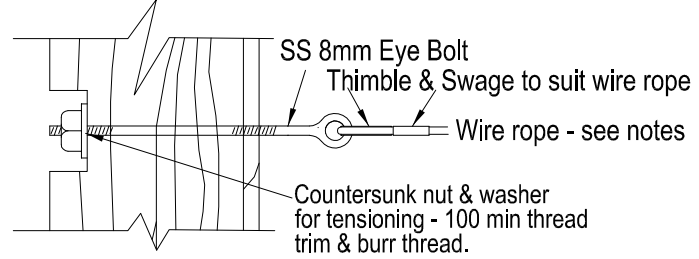

ALTERNATE POST CONNECTION

NOTES:

- All wire & Fittings to be 316 grade Stainless Steel.
- Wire Rope to be 7 x 7 x 6mm SS
- Maximum wire run 40 metres to intermediate strain post 20 metres to an End Post. (Run lengths to be reduced on curves)
- On each wire length at approx mid point provide a swage to restrict easy removal.
- Wire should be initially fixed taut with adjustable fittings as close to maximum extension as possible

	SCALE: AS SHOWN	DATE: Dec 2012	APPROVED:
	DRAWN: S.R. / P.J.D.	CHECKED: DS	 INFRASTRUCTURE MANAGER
	<h1>POST & WIRE FENCE</h1> <p>(Saddle & Turnbuckle Fixing)</p>		LAST AMENDED: June 2013 <h2>SD 550</h2> <p>PAGE 1 OF 1</p>